

Fig. M651 Cast Iron - Swing Pattern



FEATURES & BENEFITS


- Suitable for velocities of up to 3 metres/second
- Ideal for water or other liquids
- Bolted cover
- Suitable for mounting in horizontal and vertical pipelines



MATERIAL SPECIFICATION

Component	Material	Specification	
		BS EN	ASTM
Cover	Cast Iron	1561 EN JLI040	A126 CI B
Cover Gasket	Reinforced Compressed Graphite	-	
Hinge Pin	Brass	12164 CW603N	B16-C36000
Hinge Pin Plug	Brass	12164 CW603N	B16-C36000
Hinge	Ductile Iron	1563 EN-JS1040	A536 70-50-05
Disc	Cast Iron	1561 EN JLI040	A126 CI B
Disc Face Ring	Bronze	1982 CC491K	B62-C83600
Body Seat Ring	Bronze	1982 CC491K	B62-C83600
Body	Cast Iron	1561 EN JLI040	A126 CI B

DIMENSIONAL DRAWING

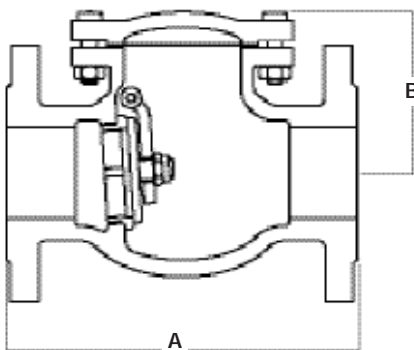

DIMENSIONS & WEIGHTS

Nom Size	mm	50	65	80	100	125	150	200	250	300
A	mm	203	216	241	292	330	356	495	622	699
B	mm	113	133	143	163	197	212	257	298	330
Weight	kg	13	18	21	35	48	68	113	218	282

PRESSURE/TEMPERATURE RATING


BS EN 1092-2 PN16
16 bar from -10 to 120°C
11.8 bar at 230°C

TEST PRESSURES

Shell: 24 bar (hydraulic)
Seat: 17.6 bar (hydraulic)

SPECIFICATION

BS EN 12334:2001.
Face to Face dimensions to BS EN 558-1 basic series 10.
Cast iron body.
Bolted cover.
Bronze trim.
Suitable for mounting in horizontal and vertical pipes (with the flow upwards).
Flanged to BS EN 1092-2 PN16.
Flanges drilled to BS 10 available.

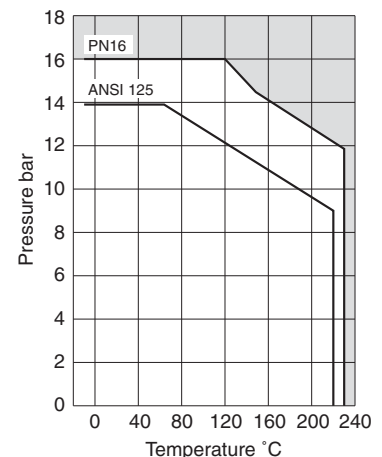

0813_V3

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.