

Fig. 13
Bronze



FEATURES & BENEFITS


- High quality bronze body with robust spherical shape
- Rising stem and screwed bonnet
- Assures accurate flow regulation/control
- Suitable for high pressures up to 32 bar



MATERIAL SPECIFICATION

Component	Material	Specification	
		BS EN	ASTM
Handwheel Nut	Aluminium	-	
Gland Nut	Brass	12164 CW614N	B16 C36000 B124 C37700
Packing	PTFE	-	
Bonnet	Bronze	1982 CC491K	B62 C83600
Stem	Brass	12165 CW617N	B455 C38000
Disc Stem Nut	Brass	12164 CW603N	B16 C36000
Disc Holder	Brass	12164 CW614N	B16 C36000 B124 C37700
Disc Retaining Washer	Brass	12164 CW614N	B16 C36000 B124 C37700
Body	Bronze	1982 CC491K	B62 C83600

DIMENSIONAL DRAWING

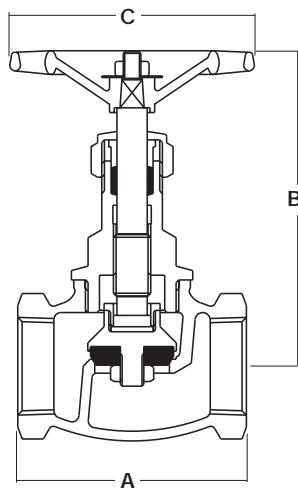

DIMENSIONS & WEIGHTS

Nom Size	in	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	mm	51	51	60	74	86	99	109	130
B (Open)	mm	72	72	92	108	118	137	162	166
C	mm	56.5	56.5	68.3	75.1	82	94	100	119
Weight	kg	0.3	0.3	0.5	0.6	1.1	1.6	2.2	3.7

PRESSURE/
TEMPERATURE RATING


BS 5154:1991 PN32 Series B
14 bar at 198°C
32 bar from -10 to 100°C

TEST PRESSURES
(PNEUMATIC)

Shell: 6 bar
Seat: 6 bar

SPECIFICATION

BS 5154:1991.
Bronze body.
PTFE replacement disc.
Rising stem.
Screwed bonnet.
Taper threaded BS EN 10226 (ISO 7-1) formerly BS 21.
Available with NPT threads to ASTM B1.20.1

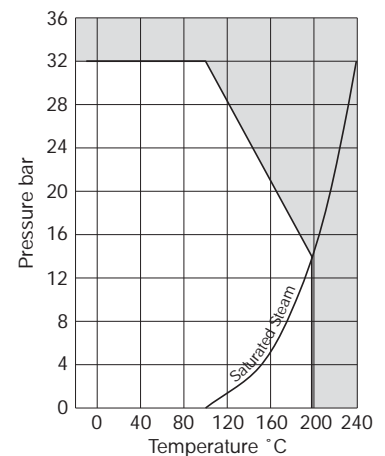

0813_V3

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.